




Alu Vista

V15/325/5

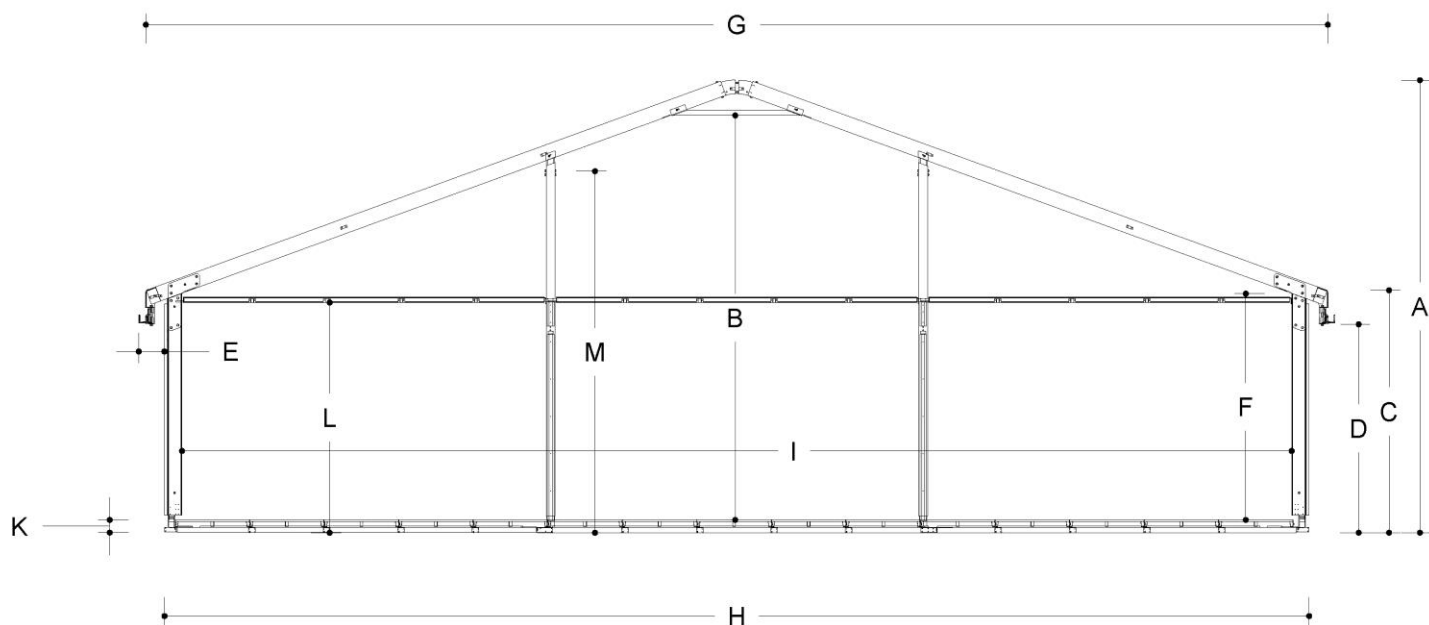


Technical data

	(mm)			
A	External ridge height	6070	Wind load	0,50 kN/m ²
B	Internal free ridge height	5419	Snow load	0 KN/m ²
C	External side height	3252	Bearing capacity standard floor	500kg/m ²
D	External free height	2800	Column profile	120x200
E	Roof overhang	252	Maximum roof load	400kg per rafterset
F	Internal free side height	3020	Mounting points in structure	Columns and rafters
G	External width of the roof	15860	Roof incline	18°
H	Maximum width ground level	15350	Standard fire resistance standard	DIN 4102/B1
I	Internal width between columns	15880	roof covers	M2 B-s2,d0
J	Bay distance	5000		
K	Floorheight	183		
L	Maximum headway ground to underside	3090		
M	gable purlin	4850		
	Maximum headway with internal gable			



Alu Vista

V15/325/5

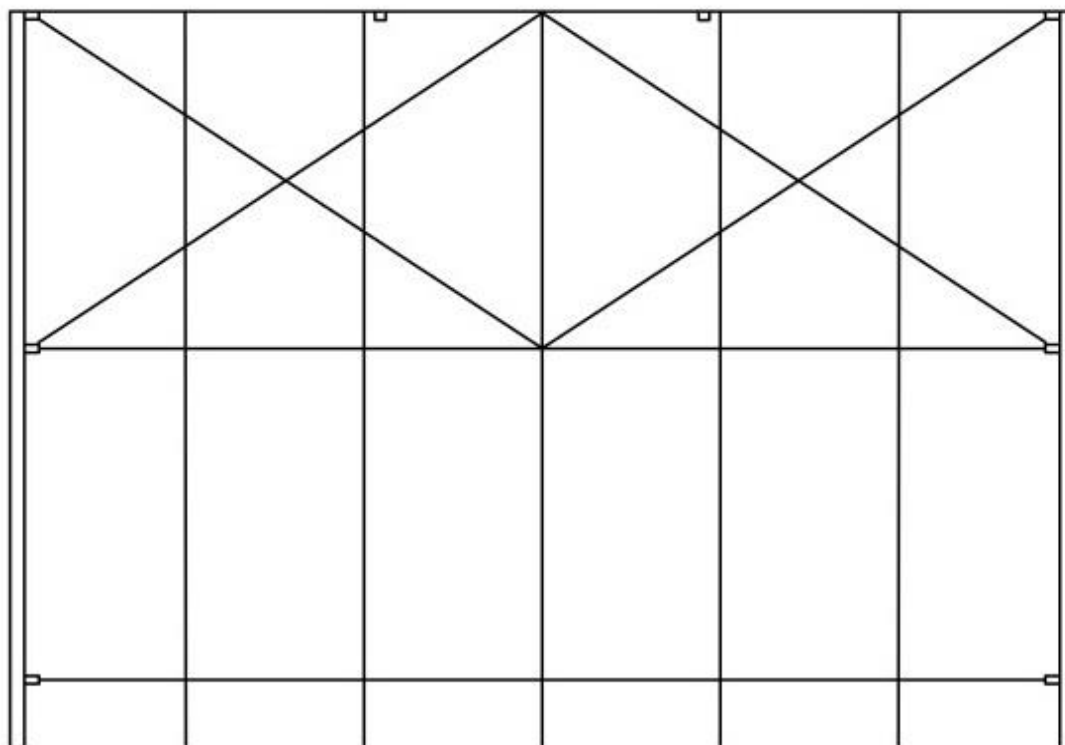

Options

Available roof covers White opaque roof cover
Transparent roof cover

Available floors Cassette floor
Plate floor
Antiskid cassette floor

Available doors Aluminium push bar door 2m
(blind)
Aluminium push bar door 2m
(glass)
Emergency door

Available side curtains and side panels Horizontal PVC side panels
Horizontal glass side panels
Sandwich side panels

Roof insulation Yes

Insulation side panels Yes


Connection to permanent buildings Yes

Connection to other Losberger De Boer structures Yes



Alu Vista

V20/325/5

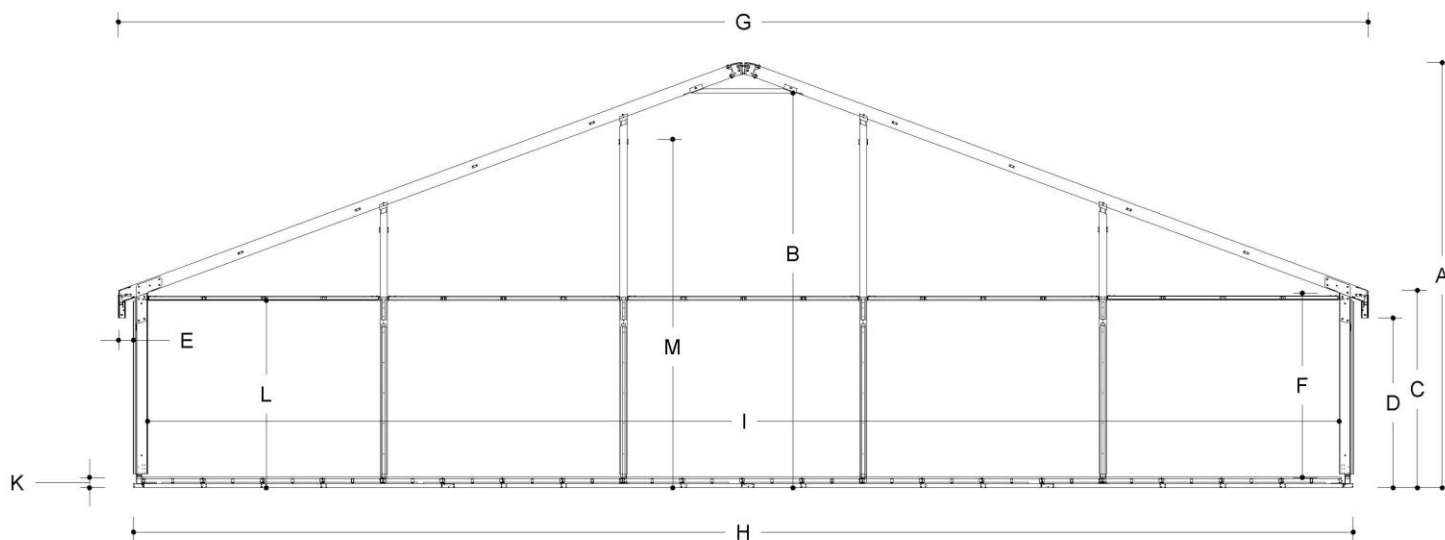


Technical data

	(mm)			
A	External ridge height	7000	Wind load	0,50 kN/m ²
B	Internal free ridge height	6322	Snow load	0 KN/m ²
C	External side height	3252		
D	External free height	2800	Bearing capacity standard floor	500kg/m ²
E	Roof overhang	252		
F	Internal free side height	3020	Column profile	120x200
G	External width of the roof	20860	Maximum roof load	400kg per rafterset
H	Maximum width ground level	20350		
I	Internal width between columns	19880	Mounting points in structure	Columns and rafters
J	Bay distance	5000		
K	Floorheight	183	Roof incline	18°
L	Maximum headway ground to underside	3090		
M	gable purlin	5900	Standard fire resistance standard	DIN 4102/B1
	Maximum headway with internal gable		roof covers	M2 B-s2,d0




Alu Vista

V20/325/5

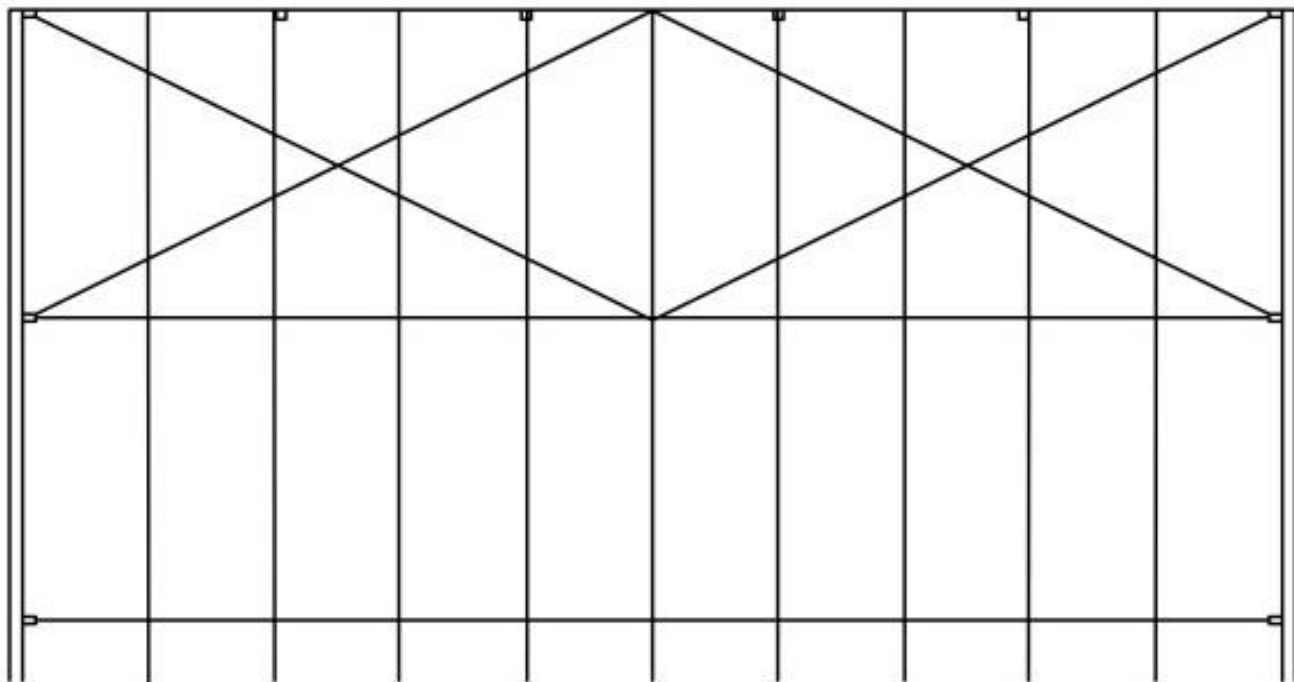

Options

Available roof covers	White opaque roof cover Transparent roof cover	Available side curtains and side panels	Horizontal PVC side panels Horizontal glass side panels Sandwich side panels
Available floors	Cassette floor Plate floor Antiskid cassette floor	Roof insulation	Yes
Available doors	Aluminium push bar door 2m (blind) Aluminium push bar door 2m (glass) Emergency door	Insulation side panels	Yes
		Connection to permanent buildings	Yes
		Connection to other Losberger De Boer structures	Yes

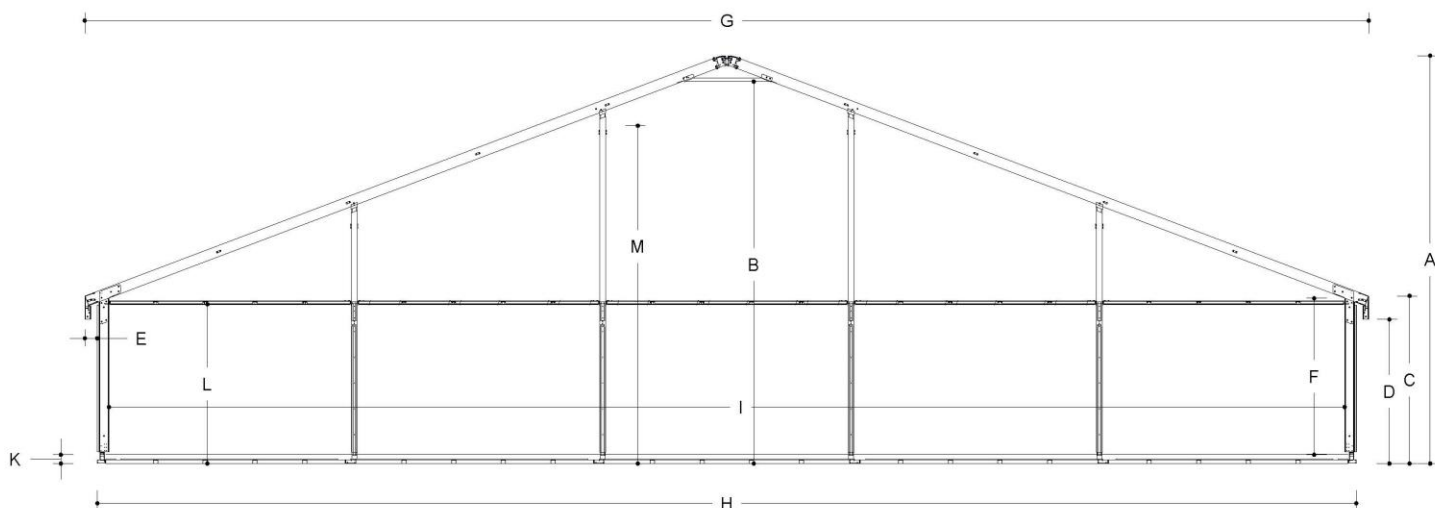


Technical data

		(mm)		
A	External ridge height	7900	Wind load	0,50 kN/m ²
B	Internal free ridge height	7222	Snow load	0 KN/m ²
C	External side height	3252	Bearing capacity standard floor	500kg/m ²
D	External free height	2800	Column profile	120x200
E	Roof overhang	252	Maximum roof load	400kg per rafterset
F	Internal free side height	3020	Mounting points in structure	Columns and rafters
G	External width of the roof	25860	Roof incline	18°
H	Maximum width ground level	20350	Standard fire resistance standard roof covers	DIN 4102/B1 M2 B-s2,d0
I	Internal width between columns	24880		
J	Bay distance	5000		
K	Floorheight	183		
L	Maximum headway ground to underside gable purlin	3090		
M	Maximum headway with internal gable	6740		



Alu Vista

V25/325/5

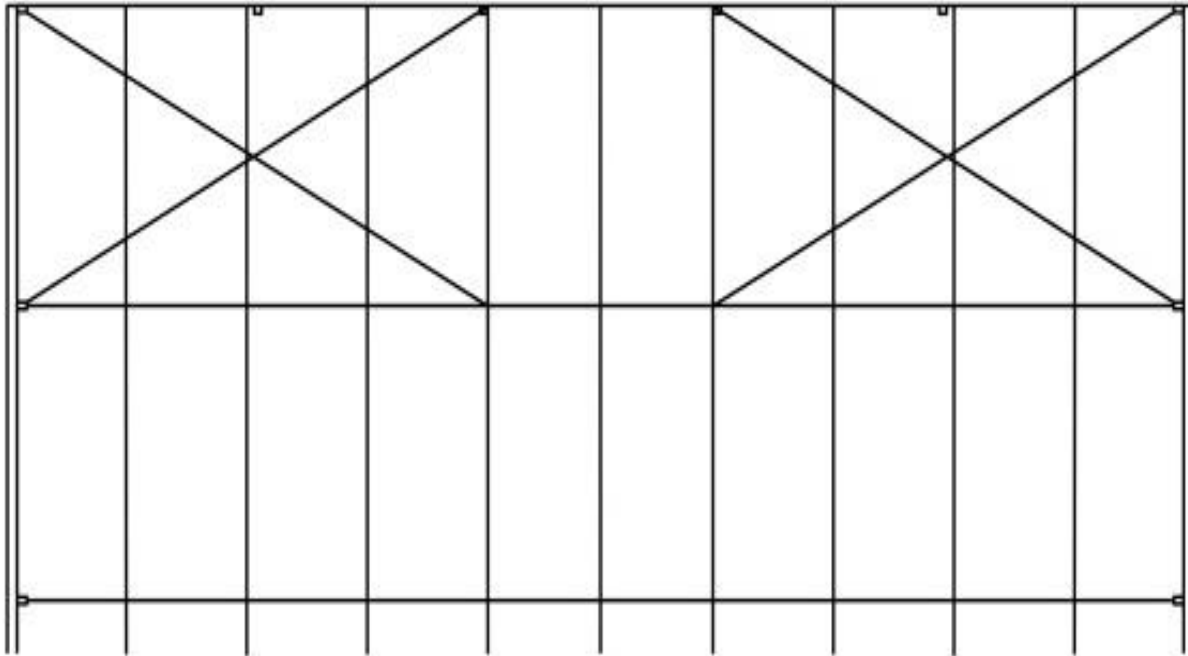

Options

Available roof covers	White opaque roof cover Transparent roof cover	Available side curtains and side panels	Horizontal PVC side panels Horizontal glass side panels Sandwich side panels
Available floors	Cassette floor Plate floor Antiskid cassette floor	Roof insulation	Yes
Available doors	Aluminium push bar door 2m (blind) Aluminium push bar door 2m (glass) Emergency door	Insulation side panels	Yes
		Connection to permanent buildings	Yes
		Connection to other Losberger De Boer structures	Yes